

MANUAL FIRE ALARM BOX

FMM SERIES

FEATURES

- Push-button type manual fire alarm box
- Restorable plexi-glass used
- Easy reset after operation
- Tele-communication means provided (FMM120A and FMM160A only)
- Response lamp provided (FMM120A and FMM160A only)
- Compatible with conventional fire alarm control panels only
- Able to start the hydrant pump with NOHMI's fire alarm panel and NOHMI'S hydrant pump starting relay box
- Approved by Japan Fire Equipment Inspection Institute

SURFACE MOUNTING TYPE



RECESS MOUNTING TYPE

DESCRIPTION

The NOHMI'S FMM series manual fire alarm box is used to manually initiate a fire alarm signal by pushing the plexi-glass which is connected to the push-button switch. The operated plexi-glass is restored by only lifting up the reset lever inside the jack cover.

A telephone jack is provided inside the jack cover on FMM120A and FMM160A. Putting the plug of a handset into the jack makes the tele-communication

be ready between the fire alarm control panel and the manual fire alarm box.

A response lamp is also provided on FMM120A and FMM160A to indicate that a fire alarm signal has been received at the fire alarm control panel.

The fire alarm signal initiated from a manual fire alarm box can be utilized to start the hydrant pump with a NOHMI's FYH series Hydrant Pump Starting Relay Box incorporated.


SPECIFICATIONS

Model no.	FMM120A	FMM160A	FMM220	FMM260
MOUNTING	Surface	Recess	Surface	Recess
TELEPHONE JACK	Provided	Provided	N.A.	N.A.
RESPONSE LAMP	Provided	Provided	N.A.	N.A.
CONTACT RATING	30VDC, 0.5A			
MATERIALS	Housing : Steel sheet with a thickness of 1.2mm			
FINISH	Baked melamin(Red)			
WEIGHT	605g	275g	595g	265g


NOHMI BOSAI LTD.

● HEAD OFFICE: 7-3, Kudan-Minami 4-chome, Chiyoda-ku, Tokyo 102-8277, Japan ● PHONE: (813)3265-0231 ● FAX: (813)3265-5348

TYPICAL WIRING DIAGRAM


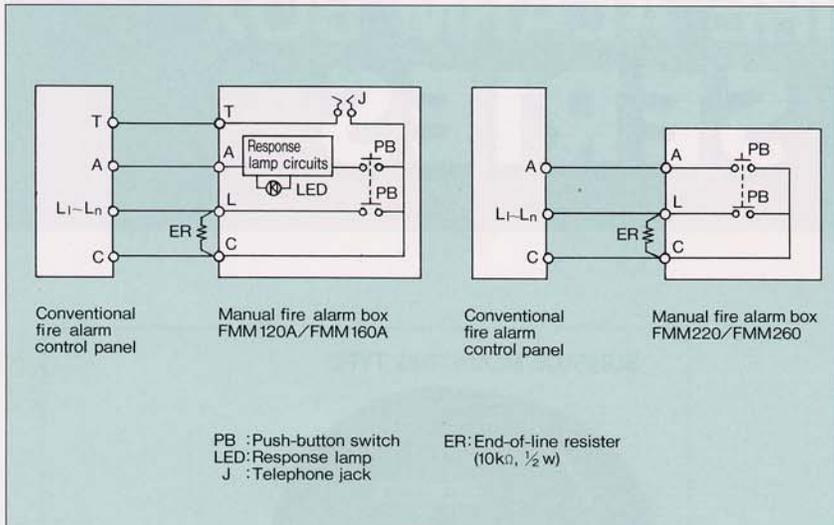


DIMENSIONS

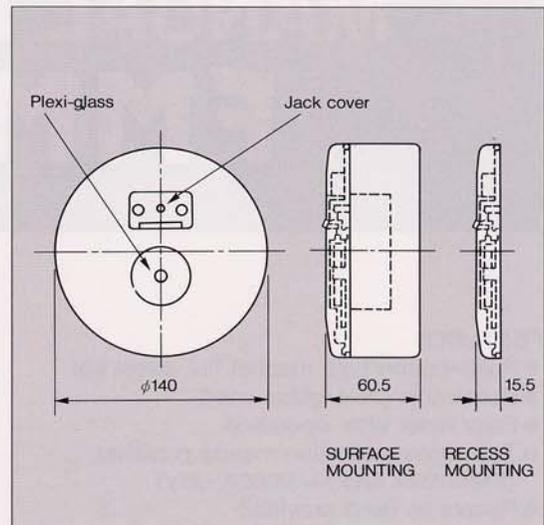


INSTALLATION

● SURFACE MOUNTING

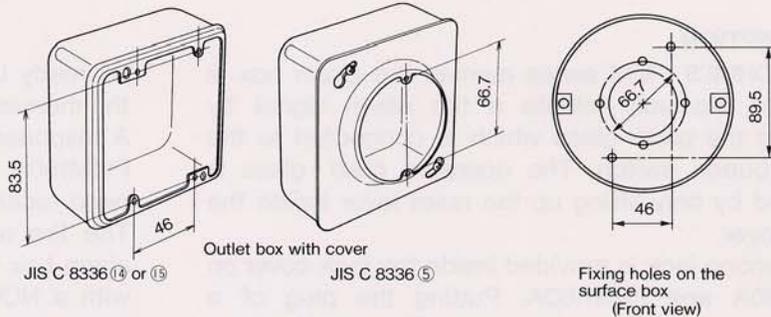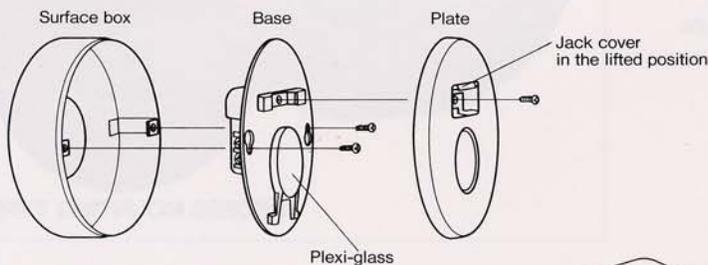

● RECESS MOUNTING

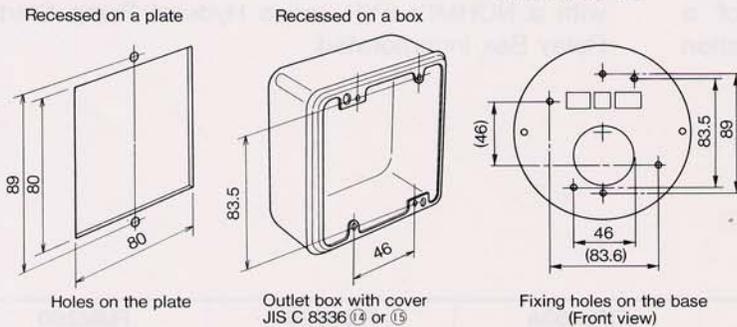

- This literature is provided for information only.
- Actual performance is based on proper application of the product by a qualified professional.
- Product details are subject to change without notice.

NOHMI

NOHMI BOSAI LTD.

- HEAD OFFICE : 7-3, Kudan-Minami 4-chome, Chiyoda-ku, Tokyo 102-8277, Japan
- PHONE : (813)3265-0231
- FAX : (813)3265-5348